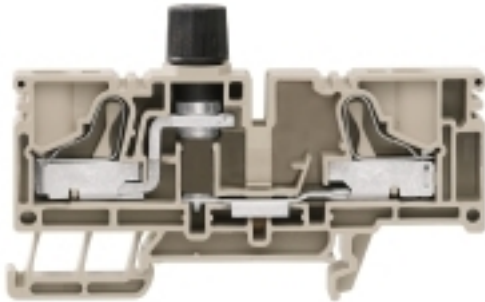


**P-series
PSI 6/10**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

Delivery status	This article will no longer be available in the future.
Available until	2021-12-31
Type	PSI 6/10
Order No.	1083050000
Version	P-series, Fuse terminal, Rated cross-section: 6 mm ² , PUSH IN
GTIN (EAN)	4032248945535
Qty.	25 pc(s).
Alternative product	2429860000

Creation date July 8, 2020 10:54:00 AM CEST

P-series
PSI 6/10

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	12.2 mm	Width (inches)	0.48 inch
Height	81 mm	Height (inches)	3.189 inch
Depth	39.6 mm	Depth (inches)	1.559 inch
Depth including DIN rail	40.35 mm	Net weight	30.64 g

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	PUSH IN connection, Fuse cartridge, for plug-in cross-connector. One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
PE connection	No	Rail	TS 35
N-function	No	PE function	No
PEN function	No		

Additional technical data

Open sides	right	Type of mounting	Snap-on
------------	-------	------------------	---------

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, max.	10 mm ²
Clamping range, min.	1.5 mm ²	Connection direction	top
Number of connections	2	Stripping length	14 mm
Type of connection	PUSH IN	Wire connection cross section AWG, max.	AWG 8
Wire connection cross section AWG, min.	AWG 16	Wire connection cross section, finely stranded, max.	10 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	10 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	1.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	1.5 mm ²
Wire connection cross-section, finely stranded, min.	1.5 mm ²	Wire connection cross-section, solid core, max.	6 mm ²
Wire connection cross-section, solid core, min.	1.5 mm ²		

Display element

Current	6.3 A
---------	-------

P-series
PSI 6/10
Weidmüller Interface GmbH & Co. KG

 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Current	6.3 A
Operating voltage, max.	250 V	Permitted power loss for the standard fuse variants	2.5 W

Rating data

Rated cross-section	6 mm ²	Rated voltage	250 V
Rated voltage to adjoining terminal	250 V	Rated current	6.3 A
Current at maximum wires	10 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	0.78 mΩ	Power loss in accordance with IEC 60947-7-x	1.31 W
Rated impulse withstand voltage	8 kV	Pollution severity	3

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
eClass 9.0	27-14-11-16	eClass 9.1	27-14-11-16
eClass 10.0	27-14-11-16		

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	EAC certificate DE_PT1703_20160415_081_ISSUE01.pdf Declaration of Conformity Terminals
Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN_WSCAD
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks

Safety note

 Safety notice [Safety Information](#)

P-series PSI 6/10

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

