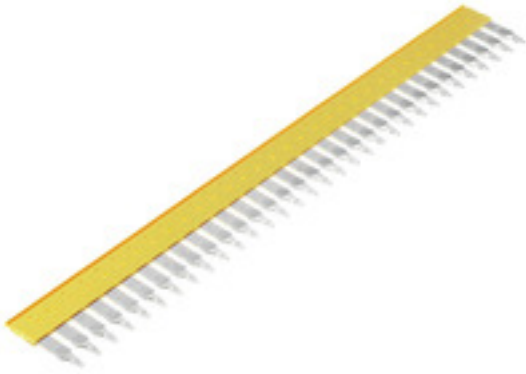


**Accessories
ZQV 6/32 GE**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Type	ZQV 6/32 GE
Order No.	1733640000
Version	Accessories, Cross-connector, 41 A
GTIN (EAN)	4008190994334
Qty.	10 pc(s).

Accessories
ZQV 6/32 GE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Width	3.1 mm	Width (inches)	0.122 inch
Height	257.3 mm	Height (inches)	10.13 inch
Depth	33.96 mm	Depth (inches)	1.337 inch
Net weight	45.6 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Installation advice	Direct mounting	Type of fixing	Plugged
---------------------	-----------------	----------------	---------

Dimensions

Pitch in mm (P)	8.1 mm
-----------------	--------

Rating data

Rated current	41 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
eClass 9.0	27-14-11-40	eClass 9.1	27-14-11-40
eClass 10.0	27-14-11-40	UNSPSC	30-21-18-01

Product information

Product information	Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

Approvals

Approvals



ROHS	Conform
------	---------

Accessories ZQV 6/32 GE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	EAC certificate
Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	26925_ZQV_6-32_GE_DXF.dxf STEP
User Documentation	Operating instructions_ZDU1.5-ZDU35_ZQV.pdf StorageConditionsTerminalBlocks