

**P-series
PHP PDL SO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

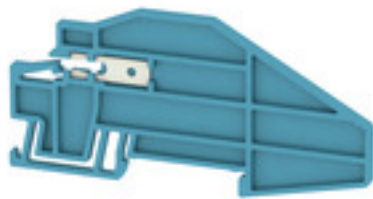
D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Product image**Building installation wiring**

For building installations, we offer a complete system that revolves around the 10×3 copper rail and comprises perfectly coordinated components: from installation terminal blocks, neutral conductor terminal blocks and distribution terminal blocks to comprehensive accessories such as busbars and busbar holders.

General ordering data

Type	PHP PDL SO
Order No.	1837080000
Version	P-series, End plate, Fixing plate, blue, 3 mm
GTIN (EAN)	4032248418800
Qty.	20 pc(s).

P-series
PHP PDL SO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	3 mm	Width (inches)	0.118 inch
Height	100 mm	Height (inches)	3.937 inch
Depth	48 mm	Depth (inches)	1.89 inch
Net weight	7.065 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	blue
UL 94 flammability rating	V-0		

System specifications

Version	End and intermediate plate	Rail	TS 35
---------	----------------------------	------	-------

Additional technical data

Installation advice	Direct mounting	Snap-on	Yes
---------------------	-----------------	---------	-----

Dimensions

TS 35 offset	49 mm
--------------	-------

Classifications

ETIM 6.0	EC000886	ETIM 7.0	EC000886
eClass 9.0	27-14-11-33	eClass 9.1	27-14-11-33
eClass 10.0	27-14-11-33	UNSPSC	30-21-18-27

Approvals

ROHS	Conform
------	---------

Downloads

Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks