

WAVESERIES

WAZ5 CCC LP 0-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com



The ACT20M-CI-CO-OLP, WAS/WAZ5 OLP signal isolator/splitter (2-wire system) is supplied via the output current loop and has an analogue DC current input. The 1- and 2-channel signal isolators are supplied from the current loop. They are available in the 6.1 mm (ACT20M series) or 17.5 mm (WAVESERIES) housings. The input and output circuits are electrically isolated from each other.

The power is supplied via the 4–20 mA current loop on the output side.

The devices come optionally in a splitter version with two loop-fed outputs.

The devices can be mounted on a DIN rail and consume minimal power.

International approvals (such as ATEX Zone 2, UL C1D2 and FM Div2) permit use in explosion-risk zones.

Signal converters with output-loop power supplies are used in a variety of application processes as signal isolators and signal multipliers (splitters) and signal amplifiers. They can be used to eliminate measurement errors caused by differences in earth potentials.

General ordering data

Delivery status	This article will no longer be available in the future.
Available until	2021-12-31
Type	WAZ5 CCC LP 0-20/0-20MA
Order No.	8444960000
Version	Passive isolator, Input : 0(4)-20 mA, (loop powered), Output : 0(4)-20 mA
GTIN (EAN)	4032248102105
Qty.	1 pc(s).
Alternative product	7760054357

WAVESERIES
WAZ5 CCC LP 0-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	92.4 mm	Length (inches)	3.638 inch
Width	17.5 mm	Width (inches)	0.689 inch
Depth	112.4 mm	Depth (inches)	4.425 inch
Weight	100 g	Net weight	92.4 g

Temperatures

Operating temperature, max.	70 °C	Operating temperature, min.	-25 °C
Storage temperature, max.	80 °C	Storage temperature, min.	-40 °C
Operating temperature	-25 °C...70 °C	Storage temperature	-40 °C...80 °C

Probability of failure

MTTF	2,097 Jahre
------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Input current	0(4)...20 mA current loop
Pick-up current		Voltage drop	Approx. 3 V at $R_L = 0 \Omega$; approx. 13 V at $R_L = 500 \Omega$; ($I_{IN} = 20 \text{ mA}$)
	< 100 μA		

Output

Number of outputs	1	Output current	0...20 mA, 4...20 mA
Load impedance current	$\leq 500 \Omega$		

General data

Accuracy	< 0.1 % of end value	Configuration	none
Galvanic isolation	Passive isolator	Input/Output	0(4)...20 mA/0(4)...20 mA (1-channel)
Rail	TS 35	Temperature coefficient	$\leq 50 \text{ ppm/K}$ of final value
Voltage supply	via the input measuring circuit		

Insulation coordination

Clearance & creepage distances	$\geq 5.5 \text{ mm}$	EMC standards	EN 55011, EN 61000-6
Galvanic isolation	Passive isolator	Impulse withstand voltage	6 kV
Insulation voltage	4 kV_{eff} / 1 s	Insulation voltage input or output/rail	4 kV_{eff} / 1 min.
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

Connection data

Type of connection	Tension-clamp connection	Stripping length, rated connection	7 mm
Clamping range, rated connection	1.5 mm^2	Clamping range, min.	0.5 mm^2
Clamping range, max.	2.5 mm^2		

WAVESERIES

WAZ5 CCC LP 0-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmüller.com

Technical data

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-20
eClass 10.0	27-21-01-20	UNSPSC	31-12-10-07

Product information

Product information This product will soon be replaced by a new product.
 Please do not use with new systems. Please contact our technical support.

Approvals

Approvals



ROHS Conform

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
User Documentation	Instruction sheet

WAVESERIES WAZ5 CCC LP 0-20/0-20MA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Connection diagram

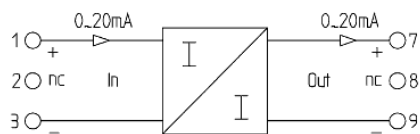

Derating curve

