

**Accessories**  
**CB 200/4.5 BLACK****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

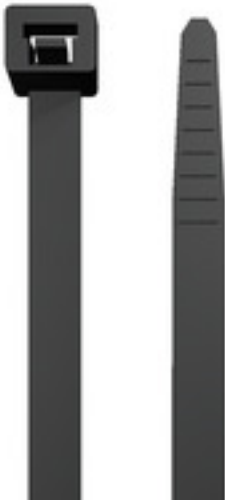

CB cable ties for the fastening of cables and markers.

- They are particularly suitable for fastening CLI M, SFX, WKM and WKS cable markers
- IEC 62275: 2006-conformant
- Fracture-resistant polyamide PA 6.6 with flammability rating V2 to UL-94

**General ordering data**

Type	CB 200/4.5 BLACK
Order No.	<a href="#">1697910000</a>
Version	Cable ties, Height x width: 200 x 4.5 mm, Polyamide 66, 220 N
GTIN (EAN)	4008 190882983
Qty.	100 pc(s).

Creation date July 9, 2020 7:37:04 AM CEST

Catalogue status 09.07.2020 / We reserve the right to make technical changes.

**Data sheet**

**Accessories  
CB 200/4.5 BLACK**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Dimensions and weights**

Width	4.5 mm	Width (inches)	0.177 inch
Height	200 mm	Height (inches)	7.874 inch
Depth	1.4 mm	Depth (inches)	0.055 inch
Net weight	1.28 g		

**Installation materials**

Cable diameter, max.	50 mm	Material	Polyamide 66
Operating temperature range, max.	85 °C	Operating temperature range, min.	-40 °C
Tensile strength	220 N	UL 94 flammability rating	V-2

**Classifications**

ETIM 6.0	EC000046	ETIM 7.0	EC000046
eClass 9.0	27-14-07-02	eClass 9.1	27-14-07-02
eClass 10.0	27-14-07-02	UNSPSC	30-21-18-01

**Approvals**

Approvals



ROHS Conform

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">DE PI830000_160627_001</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Engineering Data	<a href="#">STEP</a>

**Data sheet**

**Accessories**  
**CB 200/4.5 BLACK**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

